


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 24 TOWNSHIP 14 RANGE 3  
DATE: 8-29-05  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 10-1-98  
EDM ties  
IN. S.P.C. E ZONE NAD '83  
NAME: 14032401  
N: 488739.9668(m)  
E: 57795.6243(m)

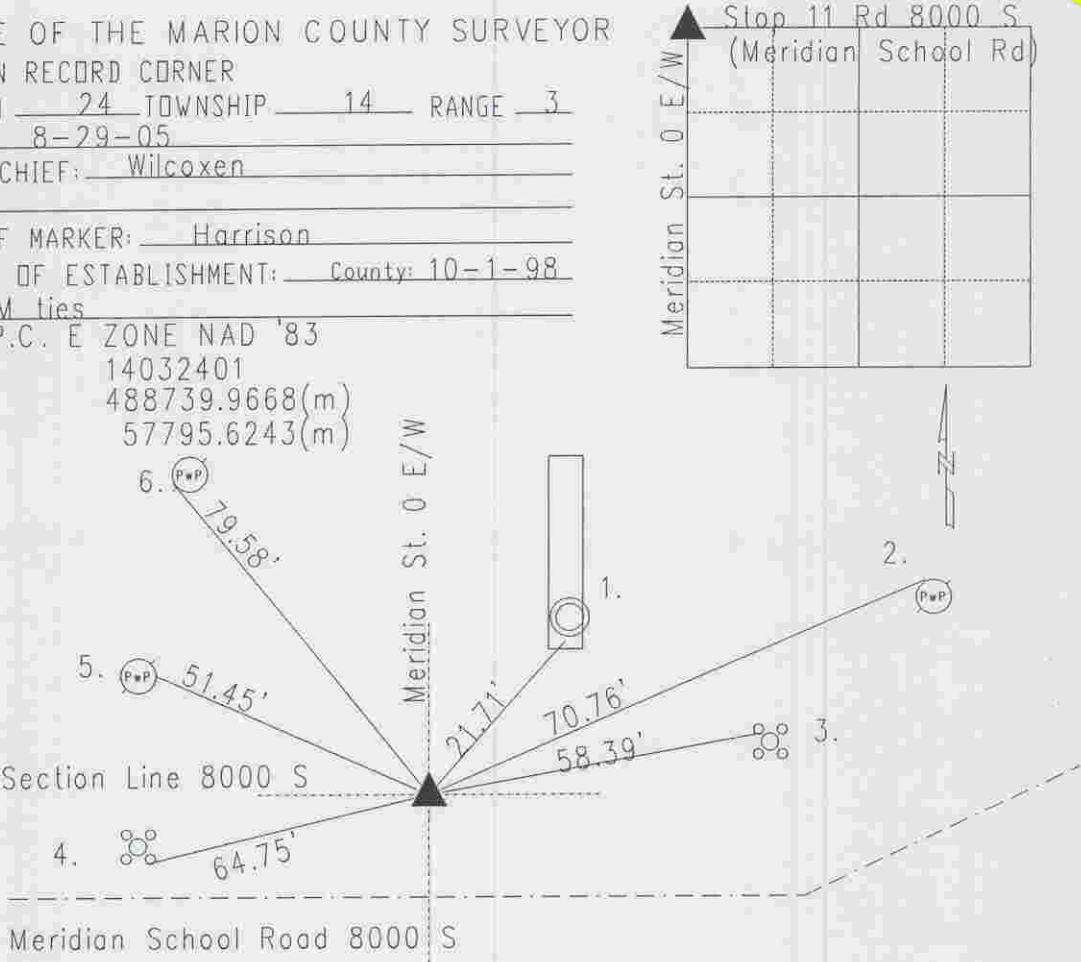

Original post set 1820 by Laughlin with witness: 10" ash N 57 W 44 links, 12" ash S 85 E 62 links per Marion County Atlas pg. 5. No entry found in Perry Township Legal Survey Book. 6-3-63 showed reference ties but do not call out the type of monument. Wilcoxon 4-20-79 called brass plug. Wilcoxon 6-26-86 called same. At the completion of Meridian Street Construction the corner was excavated and stone recovered 21" below surface. Harrison set. Re-tied 10-1-98. Also, re-set Harrison July 05 because of new construction. Re-tied 8-29-05 by Wilcoxon. 14032401

REF.	DISTANCE	DESCRIPTION
1.	21.71'	Cut 'x' in W-edge of traffic manhole
2.	70.76'	PK nail NW PwP#24-786 8"up
3.	58.39'	Cut 'x' NW bolt of light pole base
4.	64.75'	Cut 'x' SF bolt of light pole base
5.	51.45'	Mag nail w/brass washer F PwP#344-785 8"up
6.	79.58'	Mag nail w/bw S PwP#55-785 8"up